

PT Torishima Guna Indonesia

Jl. Rawa Sumur Timur No.1
Pulogadung Industrial Estate
Jakarta 13930
T. +62 21 460 6448
F. +62 21 460 3964
E. marketing@torishima.co.id
www.torishima.co.id

CAM (Cast Iron)

CAS (Stainless Steel)

End Suction Volute Pump



CAM

CAS

Go Green with the Eco Pumps, CA series.

End-Suction Volute Pump (16 bar type)

CAM is made from Cast Iron.
CAS is made from Stainless Steel.




As a high efficiency Eco Pump, the 16 bar type CA series offer a wide range of specification, design and material to meet your needs.

High Efficiency Pump and Motor


Optimized Hydraulic Performance

CFD optimized casing design ensures smooth fluid flow.

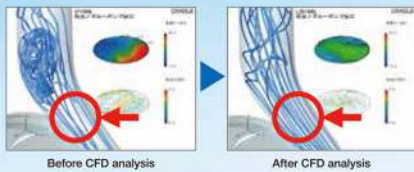

3D Impeller

Three dimensional curved impeller optimizes fluid flow.

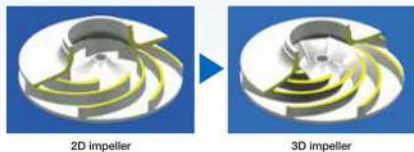

Ultra High Efficiency Motor



Torishima Ultra high efficiency motor is equivalent to IEC IE3 (premium efficiency).



TU motor
(Torishima Ultra high efficiency motor)


Meeting Customer's Specification (Impeller Cut)

The impeller diameter can be cut to meet the customer's specification to reduce unnecessary power consumption.

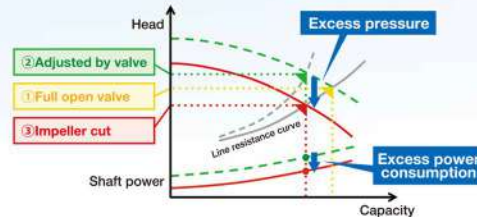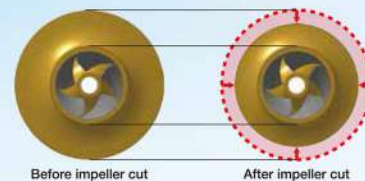

Low NPSH (High Suction Performance)

Low NPSH performance enables lower suction level which reduces plant construction costs.

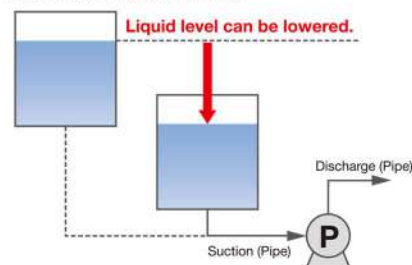

Applications High quality materials and structural designs are adopted to meet specification requirements for a variety of applications, including petrochemical, chemical and general industries, seawater desalination, high temperature heating equipment, energy-related equipment, cooling water circulation for skyscrapers, district heating and cooling, water transferring, and water feeding.



Stable Operation

Stable pump performance enables valve control and parallel operation.

High Head and Capacity, High Suction and Discharge Pressure

The CA series of CAM and CAS achieve high head and high flow rate compared to the other CA series of CAL and CAR. In addition, the optimization of casing thickness and shape, angular contact bearing, the match of cylindrical roller bearing, and the balance mechanical seal enables the highest pressure resistance of CA series.

Excellent Parts Interchangeability

Excellent parts interchangeability allows to share parts among various pump types and thus you do not need to buy or store spare parts. (☞ page 4 for details)

Handling Various Liquids and Temperature

Suitable mechanical seal and gland packing are available to meet various specification requirements. A multi-spring single mechanical seal is supplied as standard. Minimal leakage from seal improves cleanliness around pump.

Simple Maintenance

A back pull-out assembly facilitates removal of the shaft without dismantling the piping. In addition, an optional spacer coupling facilitates dismantling and inspection of the pump without disturbing the motor. (☞ page 9 for details)


Short Delivery

Stock management with an excellent quality control system enables short pump delivery time.



Performance comparison CAM to CPCN that is a former type of CAM.

— CAM65-240 - - - CPCN80-200

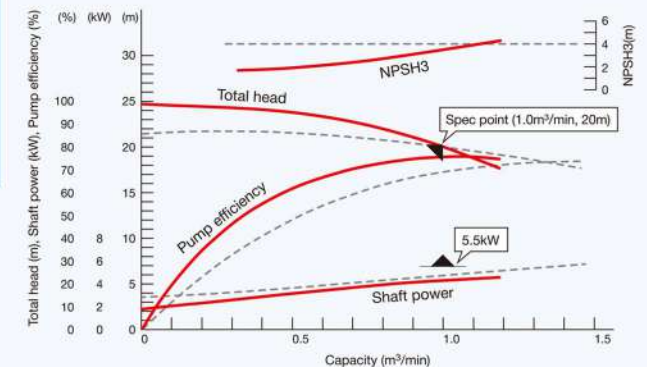Improved pump efficiency and stability!



Specification

		CAM (Cast Iron) 	CAS (Stainless Steel) 
Handled liquid	Kinds	Clean water, Warm water, Oil, Chemical medicine, Brine, Heat transfer media, etc.	Pure water, Hot water, Sea water, Salted water, Refrigerant, Electrodeposition paint, Abrasive slurry liquid under 3wt%, etc.
	Temperature	Standard: -10°C to +80°C Option: -30°C to +350°C	Standard: -10°C to +80°C Option: -40°C to +220°C
Max. allowable discharge pressure		Standard: 1.6MPa Option: 2.5MPa	Standard: 1.4MPa Option: 2.5MPa
Max. allowable suction pressure		Standard: 1.0MPa (Deep groove ball bearing) Option: Max. allowance discharge pressure - Pump shut-off head (Angular contact bearing + Cylindrical roller bearing) Ex.) In case of 2.5MPa max. allowance discharge pressure (Casing: FCD [CAM], SCS1T1 [CAS]) and 0.5MPa pump shut-off head, allowable suction pressure is 2.0MPa.	
Structure	Impeller	Closed	
	Shaft seals	Standard: Unbalanced mechanical seal (SiC × Carbon) Option: Unbalanced mechanical seal (SiC × SiC, Tungsten Carbide × Tungsten Carbide, etc.), Double mechanical seal, balanced mechanical seal, Gland packing	
	Lubricated bearing	Standard: Oil lubrication Option: Grease lubrication	
Flange standard		Standard: JIS20K RF Option: JIS10K, ASME125lb/150lb/250lb/300lb, JPI150lb/300lb	Standard: JIS10K RF Option: JIS20K, ASME150lb/300lb, JPI150lb/300lb
Pump material	Casing	Standard: FC250 Option: FCD400-15	Standard: SCS13 Option: SCS14, SCS1T1 (SCS16, 11)
	Impeller	Standard: FC200 Option: FCD400-15, SCS1T1, SCS13	Standard: SCS13 Option: SCS1T1, SCS14
	Shaft	Standard: SUS420J2 Option: SCM440Q, SUS316L, SUS329J1, SUS304, SUS316	Standard: SUS304 Option: SUS420J2, SUS316, SUS316L, SUS329J1

Parts Interchangeability

■ 2P type Same color and number in the same parts indicate interchangeability.


Pump type	Parts	Casing	Casing Cover	Bearing Housing	Shaft	Mechanical Seal
32-125	1					
40-125	2		1			
65-125	3					
32-160	4					
40-160	5		2	1	1	1
50-160	6					
32-200	7					
40-200	8		3			
50-200	9					
80-160	10		4	2	2	
80-200	11		5			
32-250	12					
40-250	13		6	3	3	2
50-250	14					
80-250	15		7			

■ 4P type Same color and number in the same parts indicate interchangeability.



Pump type	Parts	Casing	Casing Cover	Bearing Housing	Shaft	Mechanical Seal
32-125	1					
40-125	2		1			
65-125	3					
32-160	4					
40-160	5					
50-160	6		2	1	1	1
65-150	7					
32-200	8					
40-200	9		3			
50-200	10					
65-190	11					
100-125	12		4			
80-150	13		5	2	2	
80-190	14		6			
125-160 *	15		7	3	3	
100-190 *	16		8			
32-250	17					
40-250	18		9	2	2	2
50-250	19					
65-240	20		10			
80-240	21					
100-250 *	22			3	3	
40-315	23					
50-315	24		11			
65-310	25					
80-310	26		12	4	4	
100-310 *	27					
150-190 *	28					
150-200 *	29		13	3	5	
200-200 *	30					
125-240 *	31		14	4	6	
125-250 *	32			5	7	3
200-250 *	33					
125-310 *	34		15		7	
125-315 *	35		16	4	6	
80-400	36		17	5	7	
100-400 *	37		18			
125-400 *	38		19	6	8	
250-240 *	39					
250-250 *	40					
150-310 *	41		20			4
150-315 *	42					
250-310 *	43		21		9	
250-315 *	44					
150-390 *						
150-400 *						
100-500 *						
125-500 *				7	10	5
150-500 *						
200-390 *					9	4
200-400 *						
200-490 *					11	5
200-500 *						

6P type follows above *.

Design Features

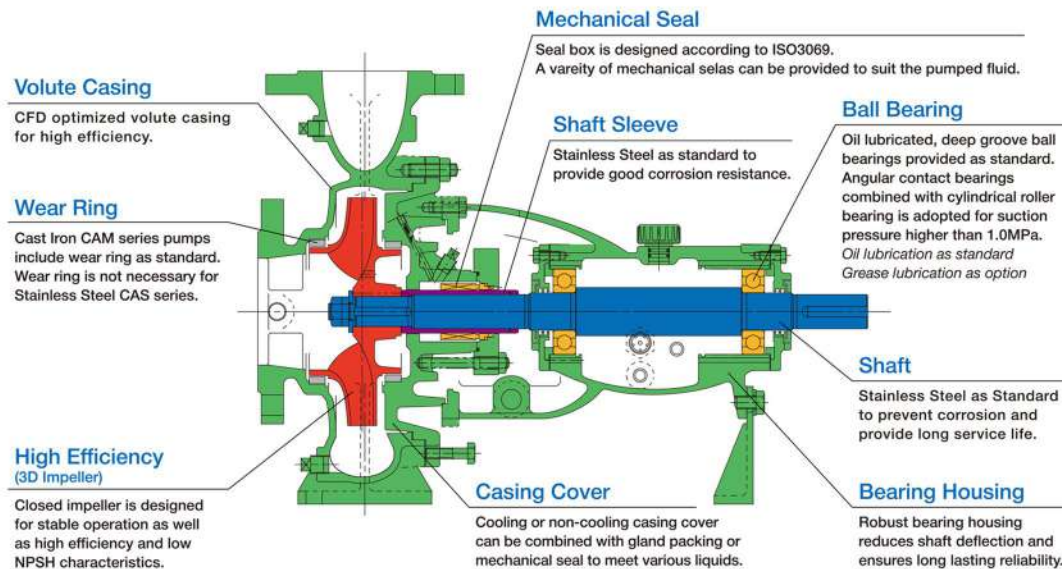

Selection Range Charts

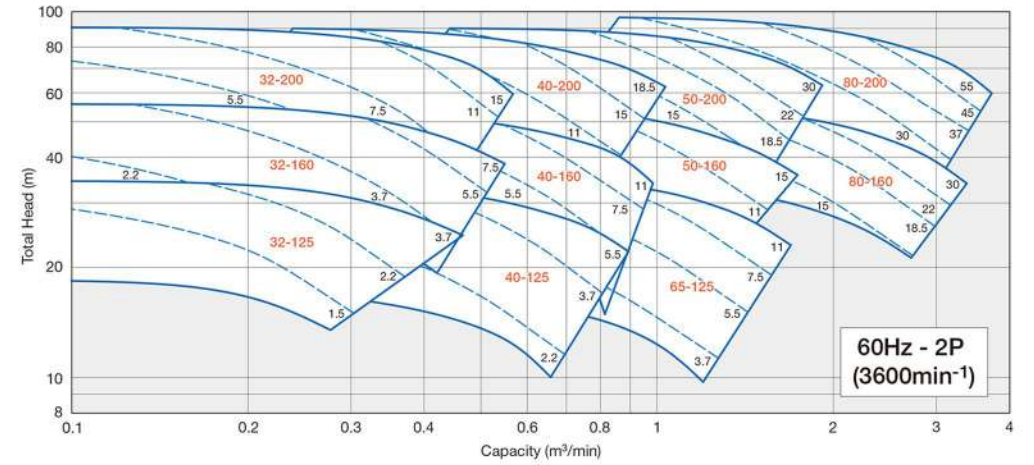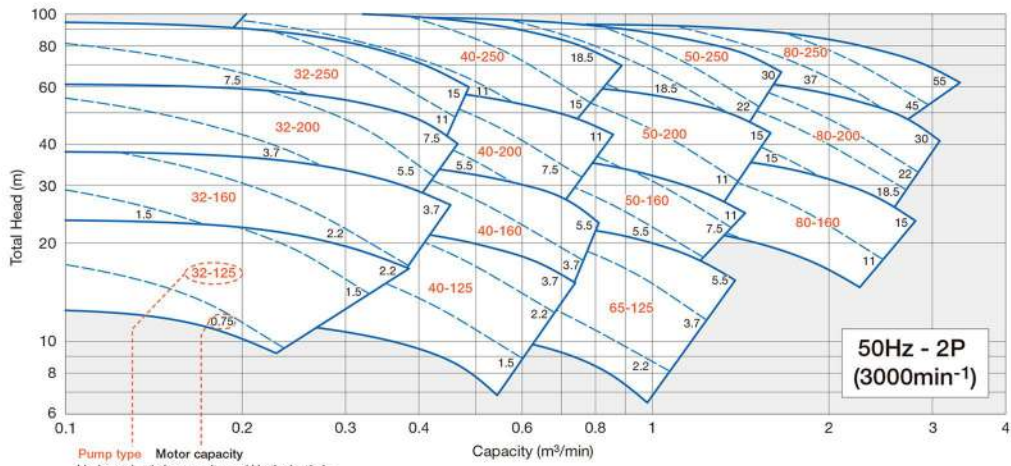

Pump type Motor capacity
Horizontal axis is capacity and Vertical axis is total head. Pump size inside a box including equipment spec point meets the specifications.

